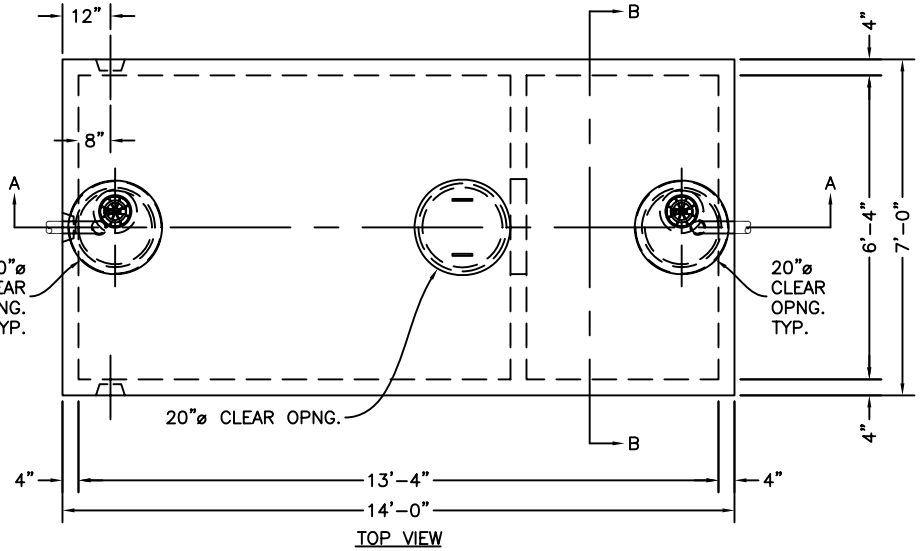

TOP VIEW

SPECIFICATIONS:

CONCRETE:	4,000 P.S.I. @ 28 DAYS.
ENTRAINED AIR:	5% – 9%.
STEEL:	A.S.T.M. A496–A615 GRADE 60–60 KSI.
DESIGN LOADING:	A–0.3/300PSF/WALKWAYS. FLOTATION FORCES NOT ACCOUNTED FOR.
PIPING:	OUTLET TEES AND DROP LEGS SUPPLIED & INSTALLED BY G.C.
FRAME & COVER & RISERS:	SEE DWG. #GO–NTTNKRSR – "NON–TRAFFIC TANK RISERS".
COVER OVER TANK:	MAX. 3' OF EARTH FILL.
INCLUDED ITEMS:	6" SEWER VENT COVER. 20"ø PLUG COVER.

WEIGHT:

TOP SECTION:	16,829 LBS.
MID–SECTION:	8,936 LBS.
BOTTOM SECTION:	11,177 LBS.
TOTAL:	36,942 LBS.

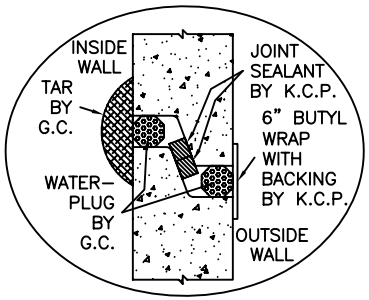

WATERTIGHT JOINT DETAIL
SCALE: N/A

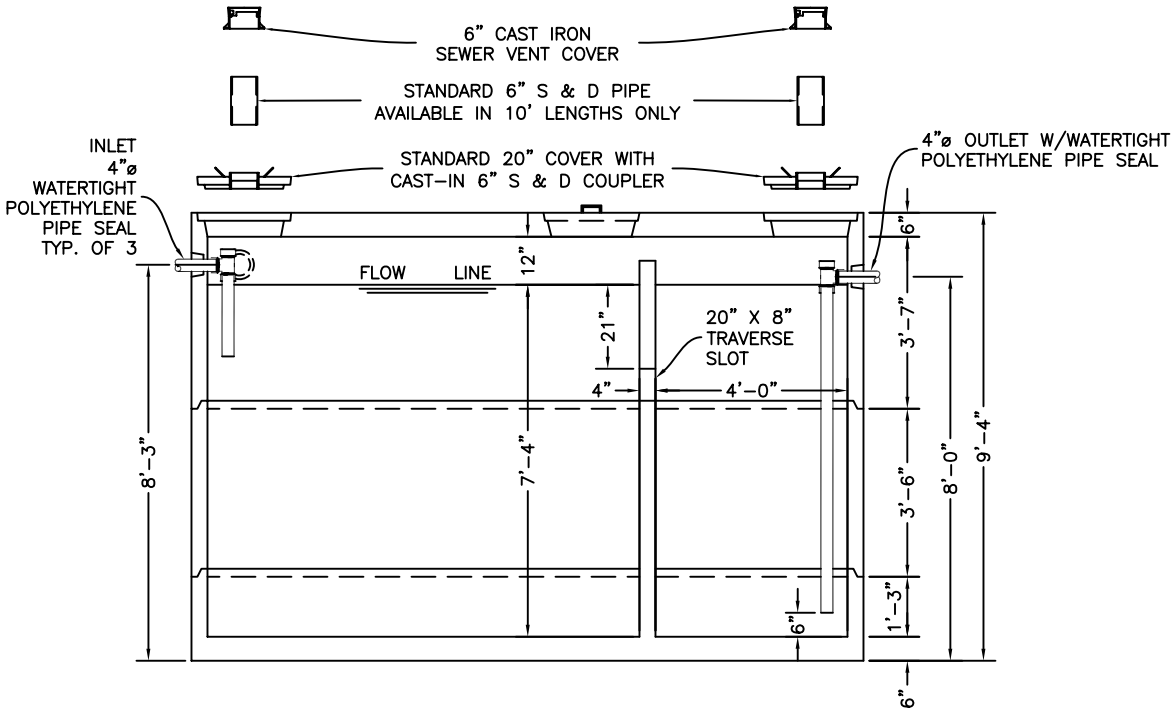

SECTION A–A

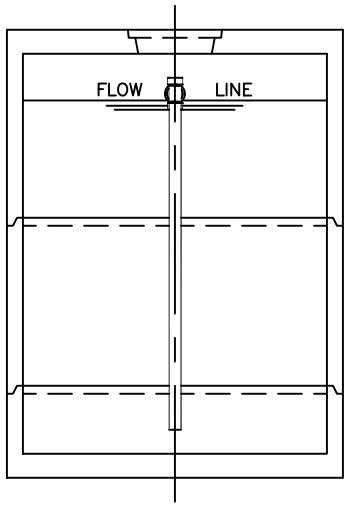

SECTION B–B

KISTNER CONCRETE PRODUCTS INC.
8713 READ ROAD
E. PEMBROKE, N.Y.
14056
(716) 894–2267

PRODUCT DESIGNATION

4500 GALLON OIL SEPARATOR

DWG. NO.

OS–OS4500 ©

4–4–05

O:\Drawings\Product Workbooks\024-Squarerectangular-07x14-84X168\OS4500.dwg