

KISTNER CONCRETE PRODUCTS INC.
 8713 READ ROAD
 F. PEMBROKE, N.Y.
 14056
 (716) 894-2267

PRODUCT DESIGNATION
2000 GAL. OIL SEPARATOR

DWG. NO. OS2000J-PD ©
 11/18/13




SP-7A SPECIFICATIONS:
 CONCRETE: 4,000 P.S.I. @ 28 DAYS.
 ENTRAINED AIR: 5% - 8%.
 STEEL:
 DESIGN LOADING: NON-Traffic
 @ 300 LBS./SQ. FT. (14 KPa)
 PER ASTM C1227 PERFORMANCE TESTING
 PEDESTRIAN LOADING
 MAX. 3'-0"
 3'-0" BELOW GRADE

LIVE LOAD:
 EARTH FILL:
 WATER TABLE:
 WEIGHT:
 TOP SECTION: 8,265 LBS.
 BOTTOM SECTION: 8,390 LBS.
 TOTAL: 16,655 LBS.

PIPING: TEES, DROP LEGS & FITTINGS SUPPLIED AND INSTALLED BY G.C.
FRAME & COVER & RISERS: SEE DWG. #GO-NTTKRRSR - "NON-Traffic TANK RISERS".

INCLUDED ITEMS: 6" SEWER VENT COVER.
 20" Ø PLUG COVER.
 WATER-TIGHT ASSEMBLY IS THE RESPONSIBILITY OF THE INSTALLING CONTRACTOR. ASK FOR KISTNER "WATER-TIGHT JOINT INSTALLATION" DETAIL.

- PIPE OPENINGS STOCK:**
 PIPE SEALS REQUIRED
 4" PVC - OPENING WITH SEAL - STOCK

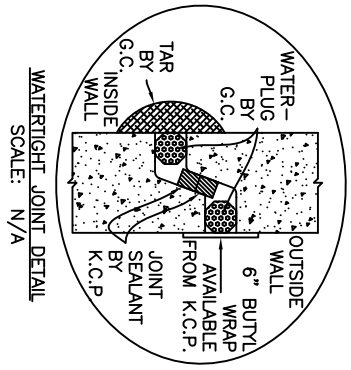

SECTION A-A

SECTION B-B